

Installing and Setting Up Software AG Products for OpenVMS

- Installation Overview
 - Naming Conventions
 - Installation Package
 - Mounting the CD-ROM
 - CD-ROM Directory Structure
 - Read the README File
-

zum Vergleich, was im allgemeinen UNIX Dokument steht

- Step 1: Create the Administrator's Account and Group
- Step 2: Back Up Your Current Product Version
- Step 3: Log in as User sag
- Step 4: Install the Contents of the CD-ROM to Disk
- Step 5: Check Images
- Step 6: Read the README Files
- Step 7: Create the Environment File sagenv.new
- Step 8: Modify User Profiles
- Step 9: Set up Product / SAG Environment

Installation Overview

This section describes how to install Software AG products for OpenVMS (AXP).

The general procedure is:

1. Use Software AG's product Sagbase to prepare the OpenVMS environment for installation of Software AG's OpenVMS products. Sagbase creates an account and a top-level directory, in which all Software AG OpenVMS products are placed in subdirectories. For further information on Sagbase, please refer to the Sagbase documentation.
2. Use the command procedure SETUP.COM located on CD to install the product in the OpenVMS environment as described in the README.TXT file on the CD. SETUP.COM copies the Natural PSC file from the CD to the `??sag$root:[cdinst] ???` directory, changes the default location to `?? sag$root:[cdinst] ???` and starts the Polycenter Software Installation utility (PCSI) .
3. The PCSI utility guides you through the installation and verifies whether the installation was successful. After the installation the user's process environment will be set with the command procedure `??STARTUP_NAT5.COM. ??????`

Naming Conventions

The following notations are used in the names of files and directories: [vergl in Unix die Grafik. kann ich die übernehmen?](#)

Notation	Description
product	product name or short product name (PPP)
v	version number
r	release number
m	maintenance level
p	patch level
os	operating system short name

Installation Package

The installation package containing Software AG products is available on CD-ROM.

Mounting the CD-ROM

Log in to the OpenVMS system manager's account or DBA account and mount the CD-ROM using the following command:


```
$ MOUNT/OVERRIDE=ID/MEDIA=CD/UNDEF=VAR:CR <device-name>
```

The /OVERRIDE=ID qualifier is necessary because the volume label may differ from CD-ROM to CD-ROM. This qualifier implies that only the user who mounted the CD-ROM can access it and, therefore, should perform the installation.

After mounting the CD-ROM, extract the product from the CD-ROM.

CD-ROM Directory Structure

Software AG recommends the following directory structure for Natural:

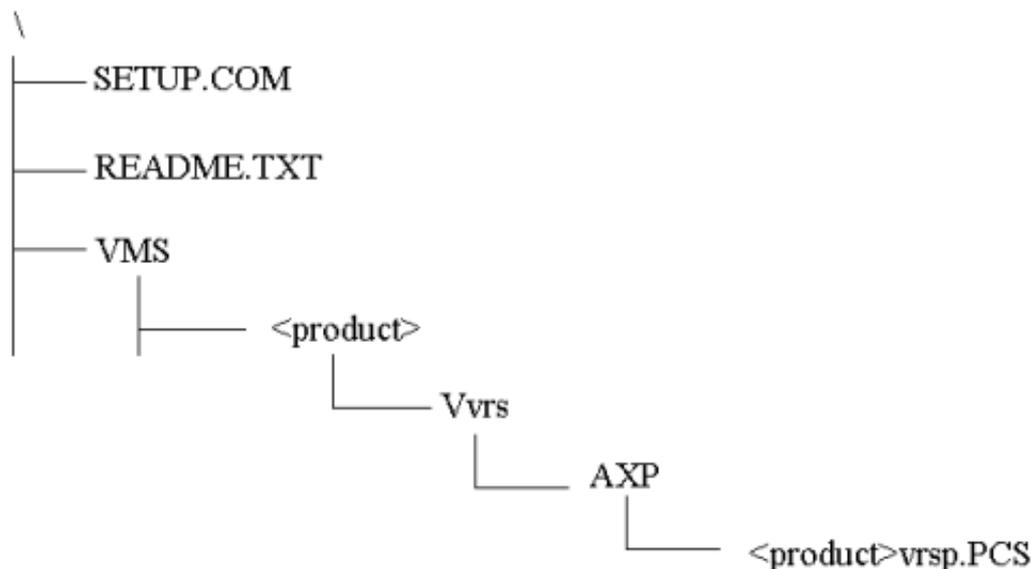

In the README.TXT file you will find important information about the product installation.

The product is saved in the product PCSI file <product>vrsp.PCS for example NAT5110.PCS for a Natural installation.

The SETUP.COM procedure invokes the installation.

Installing the product

Ab hier Text aus Evas Booklet Input. Anders strukturieren!

Use the SETUP.COM procedure to copy the product file to the SAG root directory and to start the PCSI installation procedure. Das ist dann die eigentliche Installation oder Vorschritte für das allgemeine Dokument?

was erscheint am Bildschirm?

Step 1: Change your current directory as follows:

```
$ SET DEFAULT <CD-ROM-device-name>:[000000]
```

Step 2: Enter the following command to start the SETUP.COM extraction procedure:

```
$ @SETUP
```

The SETUP.COM procedure will prompt you for all information it needs for the installation.

The product <product>vrsp from the CD-ROM will be copied to SAG\$ROOT:[CDINST.<os>_<product>_V<vrmp>].

Step 3: Copy the product PCSI file

Enter

Y - to copy the product PCSI file to SAG\$ROOT:[CDINST.<os>_<product>_V<vrmp>]

N - to copy the product PCSI file to another directory

RETURN - to exit this procedure

Enter Y or N:

Say "Y" to copy the product to SAG\$ROOT:[CDINST.<os>_<product>_V<vrmp>] directory or "N" to copy it to another location.

Step 4: Print the readme file

```
Print README.TXT(queue SYS$PRINT)? [Y]:
```

Say "Y" if you want to print the README.TXT file from the CD.

The SETUP.COM command procedure says you now if the product PCSI file is successfully copied to the directory SAG\$ROOT:[CDINST.<os>_<product>_V<vrmp>].
SETUP successfully done

Step 5: Invoke the PCSI installation

You have now the choice to proceed with the PCSI installation or to interrupt the installation:

The installation procedure displays the location where you copied the PCSI file in Step vorher
You may execute the PCSI installation utility now or later.

Enter

I - to install the product on SAG\$ROOT

RETURN - to exit this procedure

Say "I" to install the product with the PCSI utility. This part of the installation is [Link zum anderen Dokument](#).

If you press "RETURN", you will leave the SETUP.COM procedure. You can continue the installation if you start the SETUP.COM procedure once more.